



Turbo-Fix



- 8219

Turbo-Fix

2006/95/EC

2004/108/EC

2011/65/EC

2002/96/EC

2009/129/EC

2006/66/EC

EN 61010-1

EN 61326-1

CAN/CSA-C22.2
No. 61010-1

UL Std. No. 61010-1

FCC, 15,

, 25

2013

A handwritten signature in black ink, appearing to be 'B. J. J.' or similar, located at the bottom left of the page.

A handwritten signature in black ink, appearing to be 'M. Stoll', located at the bottom right of the page.

1	4
2	5
3	6
4	7
5	9
6	10

() , 2013

TPP Techno Plastic Products AG

CH-8219 Trasadingen, Switzerland

T +41 52 687 01 87

F +41 52 687 01 77

info@tpp.ch

www.tpp.ch

www.tpp.ch, e-mail: info@tpp.ch.

1

Turbo-Fix

1)

Turbo-Fix

2)

(MSDS).

3)

FPM (), NBR (), PA (), POM (), CR ()

4)

5)

/

Turbo-Fix.


2

2.1

- Turbo-Fix
- 1
-
-
-


2.2

Turbo-Fix

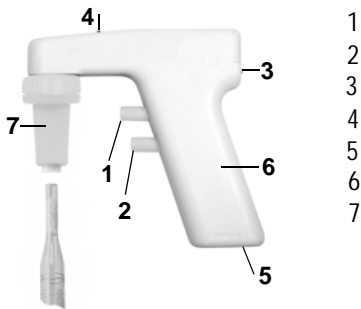

- 1
- 2
- 3
- 4
- 5
- 6
- 7

(Stabifix)



7

(Stabifix)

- 7a
- 7b
- 7
- 7d
- 7
- 7f

3

3.1

Turbo-fix 3,5
(4)
(4)
Tubro-Fix 100
Turbo-Fix

3.2



- 1) ()
- 2) (, 7-10 , 550)
- 3) (+/-) ()

3.3

24

4

4.1

)

(7e)



("5.1
òáðíáñēóæèääíèå" íà ñòð.9) è áñòàáúòå

-)
- íáú, ïì áíèåå 2 ìè.
- á) óçéíé ÷àñòùþ èáíèåå áíèç äëý ìèíåòíé
- íáú, ïì íáíåå 2 ìè.



Áíèíàíèåå

Turbo-Fix

4.2

(1),

(2),

(1,2)

(3),

óíáíúøáíèå ñéíðíñòè ðááíòù íáñíñå, á ìðååóþ - óáåèè÷áíèå ñéíðíñòè) Ìíåòíèèò èëý ìèíåòíé áíèúøíáí íáú, ìå.

Äëý óíáí, ÷òíáú æèääéíñòù áúòåèåèå èç ìèíåòíèè ñáíáíáíí, ñèååóáò íæåòòù íå éííèó áíçèðíáíéý, ìí íááíñòåòí÷í ñèèúíí, ÷òíáú íáñíñ íà÷èè ðááíòåòù. Ðåæè "ñáíáíáíáíí áúòåèáíéý" ìíåòíèèò èëý ìèíåòíé òèíå "to deliver"(TD) è íå ìíåòíèèò èëý "áúóáíúó" ìèíåòíé òèíå "blow out"(ó òåèèò ìèíåòíé èèáí ååå óííèèåå ìíèíñ, èèáí íáíå ìåòíèèò ìíèíñ íå ðåèèå ìèíåòíèè).

ÐÐÐ ìèíåòíèò Turbo-fix ìííáúáí ðæèèíí "ÒÓÐÁÍ". Äëý áñíòèæáíéý ìåñèíåèúííè ñéíðíñòè ñèååóáò áñòåèèò èååèú ñåòåáíáí áááííððå á éííððíèèèò ìèíåòíèè è ìíåòíèèò èíè, ñèèí ìåòíèèò÷òåèý á èðåéíå ìðååíå ìíèíæáíèåå.

4.3

Íàèñĩðàáĩñòù

Ïðè÷:είà íàèñĩðàáĩñòè

Ïèĩàòèà ïðòáèáò
(óðá÷:èè à ñèñòáíá)

áñòàáèáíà à éĩííáèòĩð (7).

(4.1)

(7),

ĩðĩèááèè-òèèñàòĩðà òèèüòðà (7ñ) èèè
(7d)

(7d)

Óðóááíèà èèè
ĩòñòòñòáèà òóíèèè
áñáñúááíèγ

Éĩííáèòĩð (7) íá çàòýíóð.

()

Íáðáíè÷-áíííà áðáíγ
ðááíòú ïðè ïñèíñòùð
çàðýáèííé ááòáðáá

Í÷:áíú áíèüøíá áðáíγ
çàðýáèè áèèóíóèýóĩðà

Éĩðĩòèíá áðáíγ çàðýáèè
è ðááíòú ïèĩáóĩðà

Àèèóíóèýóĩð íá çàðýáèáðòñγ

5

5.1

ÒÐÐ Ìèìàòìð Turbo-Fix ìæíí ïì-èñòèòù ñ ïïíùòò èóñí-èà òèàìè, ñíí-áíííáí á ìúèúíé áíáá èèè 70% ñíèðòá. Çàìðàóáíí èñííèúçíáàòù àòáòíí èèè áðòáèá ðáñòáíðèòáè



Ìòèðòòèòù èíííáèòìð (7) ìò ðóèíýòèè ìòò, ì ïíáíðíòà ìðìòèá ÷-áñíáíé ñòðáèèè. Óááðæèááý èíííáèòìð çá ááððìðð ÷-áñòù (7b), èðáíèí ñæàòù ìæííðð ÷-áñòù (7f) è ìíááðìóòù áèááí ìðìòèá ÷-áñíáíé ñòðáèèè ìòííèòèòáèúíí ááððìáé ÷-áñòè. Ìðè ýòíí ìæííýý ÷-áñòù áìææíá ìòñííáèíèòùñý ìò ááððìáé ÷-áñòè ìðè ìíáíðìòá ìá 1/8 ìáíðìòá.

Ìðè ìáíáóíáèííòè ìòñííáèíèòù ñèèèèííáòð ìðíèèááèó ðèèñàòìð (7á), ðèèúòð (7d) è ðáçèííáòð ìðíèèááèó ðèèñàòìð (7ñ).

Ðáèííáíáóáòñý ìáíýòù áèáðìòíáíúé ðèèúòð (7d) èáæáúá ððè ìáñýòá. Ìòííèòèè è çáñíðèáèèèñý ðèèúòð ñèááóáò çáíáíèòù ìáíáèéáíí. Òèèúòð áìææáí áúòù ìðèáíèòèðíááí óááòííé ìíèíáííé (ñèíáé èèè èðáñííé) áááðò á ñòíðìíó Òèèúòð áìææáí áúòù ìðèáíèòèðíááí óááòííé ìíèíáííé (ñèíáé èèè èðáñííé) áááðò, ìí ìáíðááèáíèð è ðóèíýòéá ÒÐÐ Ìèìàòìð Turbo-Fix.

Ìí ìèíí-àíèè ðáðìé-áñèíáí ìáñèóæèááíèý, ìðíááðèòù ìèìàòìð ìá óòá-èè, ÷-òíáú ðáíñòíááðèòùñý á ìðááèèúííé ðááíòá ÒÐÐ Ìèìàòìð Turbo-Fix: æèáèíòù ìá áìææáí áúòáèáòù èç ìáííèíáííé ìèìàòèè áí ìíáíòá ìáæáòèý èíííèè áìçèðíááíèý.

5.2



ÒÐÐ Ìèìàòìð Turbo-Fix ìáèúçý áúáðáñúááòù áìáñòá ñ áúòíáúìè ìòðíáàìè.

ÒÐÐ Ìèìàòìð Turbo-Fix ñèááóáò óèèèèçèðíááòù á ñííòááñòáèá ñ ìðááèèáè ìáðáðááíòèè ýéáèòè-áñèèó óñòðíèñòá, ááèñòáòòèè è á áàøáé ñòðáíá.

ÒÐÐ Ìèíàòíð Turbo-Fix - Ðóéíáíñòáí ïí ýéñíèóàòòè. Õàðàèòòðèñòè

6 Õáðíè÷:áñèèà òàðàèòòðèñòèèè

.13,5 / (50)
: .550	, 7-10 ,
	: 3,5

Éíèè÷:áñòáí òèèèíá: 500-1000 (íðè ñíáèðáááèè ïðááèè çàðýáè
 Áðáíý ðááíòó: ìèìèòí 5500 òèèèíá áñáñóááíèý è
 áíçèðíááíèý 25 ìè.

	: 100-240	. , 50/60
	:17	. ± 10%/180 ± 10%

Éíðíóñ èíííáèòíðà: ïíèèíèñèíáòèèáí(POM)
 Ìðíèèááèá-òèèñòáòíð ïèíáòíè: ñèèèèíí
 Ìðíèèááèá-òèèñòáòíð òèèóòðà: ñèèèèíí

()	125 130 35
	195

Ýéñíèóàòòèý: 5 - 40 Ñ, ìàèñ. ïòííèòòáèüíáý áèàæííòó 80%
 Õðáíáíèá: -10 - 50 Ñ, ìàèñ. ïòííèòòáèüíáý áèàæííòó 95%